

MTCGX Series Modular Chillers

Compact Base and Titanium Durability



MTCGV 60,000 BTU/hr model shown

New MTCGV R-410A modular chillers provide installation flexibility, reliability, maximum performance, and accessibility for easy maintenance and repair. They are ideal as drop-in replacements for Cruisair MTC R-407C units.

These reverse-cycle modules are available in capacities of 24,000-120,000 BTU/Hr (2 to 10 tons). Up to six modules can be staged to achieve higher capacities.

Thermal expansion valves optimize performance over a wide range of conditions, while a hot gas bypass valve maintains heating performance in cold seawater. With reverse-cycle heating effectiveness in seawater temperatures as low as 38° F (3.5° C), the need for separate fossil fuel or electric water heaters is eliminated in most applications.

MTCGV chillers have two sub-modules, identical in dimensions, which allow a sub-module to be rotated to achieve more convenient water connection locations or compressor access. The sub-modules can even be separated for remote mounting when space is limited. Sub-module changes can be handled in the field, or special ordered from the factory.

All units have built-in protection devices, including: high- and low-pressure switches, loop-water flow switch, hot-gas bypass valve, and loop-water freeze sensor. A wire harness with polarized plug is included for easy electrical connections.

Key Benefits

- Titanium condenser resists erosion and corrosion
- Titanium condenser increases durability and product lifespan
- R-410A replacement for Cruisair MTC chillers
- Up to six modules can be multiplexed for larger capacities
- Reverse-cycle heating
- Scroll compressors standard
- Dual sub-modules allow more convenient water connections or separation for remote mounting in tight spaces
- Removable seawater manifolds allow cleaning of condenser tubing
- Thermal expansion valve for optimal performance over a range of conditions
- Hot-gas bypass valve maintains heating performance in cold seawater and helps prevent water freezing in the heat exchanger
- Environmentally safe R-410A refrigerant



MTCGV water connections match that of the MTC series for seamless retrofitting.



Compressor vibration-isolation mounts reduce noise and vibration transmission to the mounting surface.



Easily replaceable flow switch.

Specifications for MTCGV Series Modular Chillers


Model ⁽¹⁾	MTCGX36	MTCGX48	MTCGX60	MTCGX72	MTCGX96	MTCGX120
Capacity (BTU/h)	36000	48000	60000	72000	96000	120000
Voltage (V) ⁽²⁾	230	220 230 460	230 460	230 380 460	230 380 460	230 380 460
Cycle (Hz/Phase Ph)	60/1	50/1 60/3	60/1 60/3	60/3 50/3	60/3 50/3	60/3 50/3
Full Load Amps (FLA) Cool (A)	12	12.3 8.3 5.1	17.8 11.3 5.9	14.2 8.3 4.2	10.1 20.3 25.3	12.4 15.4 19.2
Full Load Amps (FLA) Heat (A)	15.7	13.8 10.9 5.8	21.4 7.6 20.2	14.8 7.4 10.8	17.9 8.9 13.3	25.5 31.3 15.3
Locked Rotor Amps (LRA) (A)	105	115 95 45	130 60 70	145 70 87	235 100 87	267 142 147
Refrigerant Type	R410A	R410A	R410A	R410A	R410A	R410A
Max. Height (in/mm) ⁽³⁾	23.5/597	23.5/597	23.5/597	23.5/597	26.8/681	26.8/681
Width-Drain Pan (in/mm) ⁽³⁾	25.3/643	25.1/638	25.1/638	25.1/638	33/839	33/839
Max. Width (in/mm) ⁽³⁾	33.7/856	33.5/851	32.1/816	32.1/816	39/991	39/991
Max. Depth (in/mm) ⁽³⁾	12.8/326	12.7/323	12.7/323	12.7/323	16.6/422	16.6/422
Clearance Manifold (in/mm)	5/127	5/127	5/127	5/127	6/153	6/153
Seawater Inlet Connection (in/mm)	1/26	1/26	1/26	1/26	1/4/32	1/4/32
Chilled Water Connection Size (in/mm)	1/26	1/26	1/26	1/26	1/2/38	1/2/38
Chilled Water Connection Type	FPT	FPT	FPT	FPT	FPT	FPT

¹ When ordering, add one of the following codes to the model number to specify voltage: 'C' for 230V/60Hz/1-Ph, 'CK' for 220-250V/50Hz/1-Ph, 'DC' for 230V/60Hz/3-Ph, 'EC' for 460V/60Hz/3-Ph, or 'ECK' for 380V/50Hz/3-Ph. For example, MTCGX240C = 230V/60Hz/3-ph unit.

² For information about voltages not shown in this sheet, please contact Dometic Marine sales at 954-973-2477.

³ All dimensions = 0.30 in. (8 mm).

Dimensions

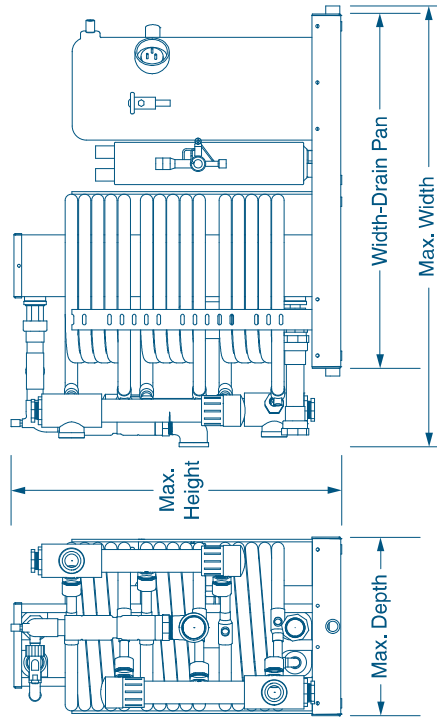

DOMETIC MARINE DIVISION
 2000 N. Andrews Ave. Ext. | Pompano Beach, FL 33069 USA | Tel. 954-973-2477 | Fax: 954-979-4414
www.Dometic.com/Marine | MarineSales@DometicUSA.com

24/7 TECH SUPPORT FOR UNITED STATES & CANADA:
 8:00 AM to 5:00 PM Eastern Time: 800-542-2477
 After hours and weekends: 888-440-4494

INTERNATIONAL SALES & SERVICES
 Europe & the Middle East: Call +44(0)870-330-6101
 For all other areas visit our website to find your nearest distributor.

L-3341 Rev. 20160212

Specifications and availability subject to change without notice.



MARINE / CARAVAN REFRIGERATION & AIRCONDITIONING

CARAVAN REPAIRS

☎ **07 3286 3522** 📍 **259 South Street, Cleveland QLD 4163**