

# MTDX Titan Series Modular Chillers

## Compact Base and Titanium Durability



Cruisair MTDX Titan modular chillers use titanium condensers to greatly increase durability and product lifespan. Titanium is unaffected by the punishing combination of saltwater, invasive marine life, and the harsh acids used for routine cleaning of the condenser coil. Titan service life is greatly extended compared to cupronickel systems—the industry standard—which inevitably suffer catastrophic failure from corrosion and erosion in the harsh marine environment.

The MTDX is a modular chiller engineered for installation flexibility, reliability, maximum performance, and easy accessibility for maintenance and repair.

Flexible hose improves alignment for customer connections, and all seawater connections are reinforced with stainless-steel for added strength. Thermal expansion valves optimize performance over a wide range of conditions, while a hot-gas bypass valve maintains heating performance in cold seawater and helps prevent water freezing in the heat exchanger. With heating performance effective in cold seawater temperatures as low as 38°F (3.5°C), the need for separate fossil fuel or electric water heaters is eliminated in most applications.

The MTDX is available in capacities of 24,000 to 120,000 BTU/hr (2 to 10 tons), and you can use multiple modules in any combination to achieve the total desired capacity. Custom frame and water-manifold installation for multiple units are also available.

Each MTDX unit has two sub-modules. This lets you rotate a sub-module to achieve more convenient water-connection locations or compressor access. The sub-modules can even be separated for remote mounting when space is limited. Sub-module changes can be handled in the field or special ordered from the factory.

The MTDX has many built-in protection devices. A wire harness with polarized plug is included for easy electrical connections.

MTDX units are available with several different compressors to suit a variety of power systems, including: 230V/60Hz/1Ph, 220V/50Hz/1Ph, 230V/60Hz/3Ph, 380V/50Hz/3Ph, and 460V/60Hz/3Ph.

Optional Variable Frequency Drives (VFDs) are available, which eliminate start-up power surge and run the unit at full-capacity 60Hz even with 50Hz input. The VFD requires a 3-phase tempering unit, but can operate on 1- or 3-phase input power.

### Key Benefits

- Titanium condenser resists erosion and corrosion
- Titanium condenser increases durability and product lifespan
- Modular design for installation flexibility
- Reverse-cycle heating
- Scroll compressors standard
- Larger drain fittings for faster condensate drainage
- Stainless-steel reinforced seawater connections
- Flexible hose improves connection alignment
- Removable seawater manifolds allow cleaning of condenser tubing
- Integrated loop-water strainer and flow switch
- Oversized heat exchangers for loop temperatures of 40°F (4.4°C) in cooling and 120°F (49°C) in heating
- Thermal expansion valve for optimal performance over a range of conditions
- Hot-gas bypass valve maintains heating performance in cold seawater and helps prevent water freezing in the heat exchanger
- Engineered to maximize the performance of R-410A, an environmentally safe refrigerant




Specifications for Cruisair MTDX Titan Series Modular Chillers

Model	MTDX24			MTDX30			MTDX36			MTDX48			MTDX60			MTDX72			MTDX96			MTDX120									
Capacity (BTU/h)	24000			30000			36000			48000			60000			72000			96000			120000									
Voltage (V)	220	230	460	230	220	230	220	230	460	230	220	230	460	380	230	220	230	460	380	230	380	460	230	380	460						
Cycle (Hz)/Phase (Ph)	50/1	60/3		60/1	50/1	60/3	50/1	60/1	60/3	60/1	50/1	60/3	50/3	60/1	50/1	60/3	50/3	60/1	60/3	50/3	60/3	50/3	60/3	60/3	50/3	60/3					
Full Load Amps (FLA) Cool (A)	9.6	6.9	3.11	6.4	9.9	8.4	6.4	12.3	12	8.3	3.9	13.8	14.7	11.3	5.2	5.8	17.8	22.2	11.3	5.9	8.3	20.1	14.2	7.1	10.1	20.3	9.2	14.7	25.3	12.4	15.4
Full Load Amps (FLA) Heat (A)	11.9	9	4.06	9.5	13	12.2	8.3	18	15.7	10.9	5	20.2	21.4	14	6.6	7.6	23	29.1	14.8	7.4	10.8	29.3	17.9	8.9	13.3	25.5	13.4	14.9	31.3	15.3	19.2
Locked Rotor Amps (LRA) (A)	97	95	45	58.3	97	77	71	115	105	95	45	150	130	120	60	70	145	130	123	70	87	145	160	87	100	235	110	267	142	147	
Max. Circuit Breaker (A)	45		20	45	60	56	35	70	50	23	80	90	55	30	33	100	60	33	42	94	80	42	100	40	56	103	50	67			
Min. Circuit Ampacity (A)	28	25	13	25	34	32	20	42	43	27	12	48	50	33	17	19	57	34	19	24	53	45	24	57	24	32	58	29	38		
Refrigerant Type	R410A			R410A			R410A			R410A			R410A			R410A			R410A			R410A									
Max. Height (in/mm) <sup>(1)</sup>	17/432			17/432			23.5/597			23.5/597			23.5/597			23.5/597			23.9/608			27.8/707									
Width-Drain Pan (in/mm) <sup>(1)</sup>	25.3/643			25.3/643			25.3/643			25.1/638			25.1/638			25.1/638			33.1/841			33.1/841									
Max. Width (in/mm) <sup>(1)</sup>	25.3/643			28.3/719			28.3/719			28.3/719			28.3/719			28.3/719			36.85/936			36.85/936									
Depth-Drain Pan (in/mm) <sup>(1)</sup>	12.8/326			12.8/326			12.8/326			12.7/323			12.7/323			12.7/323			16.7/425			16.7/425									
Max. Depth (in/mm) <sup>(1)</sup>	12.8/326			13.4/341			13.4/341			13.4/341			13.4/341			13.4/341			17.7/450			17.7/450									
Seawater Inlet Connection (in/mm)	5/8 /16			3/4 /20			1 /26			1 /26			1 /26			1 /26			1 /26			1 1/4 /32			1 1/4 /32						
Chilled Water Connection Size (in)	1			1			1			1			1 1/4			1 1/4			1 1/4			1 1/2			1 1/2						
Chilled Water Connection Type	FPT			FPT			FPT			FPT			FPT			FPT			FPT			FPT			FPT						

<sup>1</sup> All dimensions ± 0.30 in. (8 mm).

Dimensions

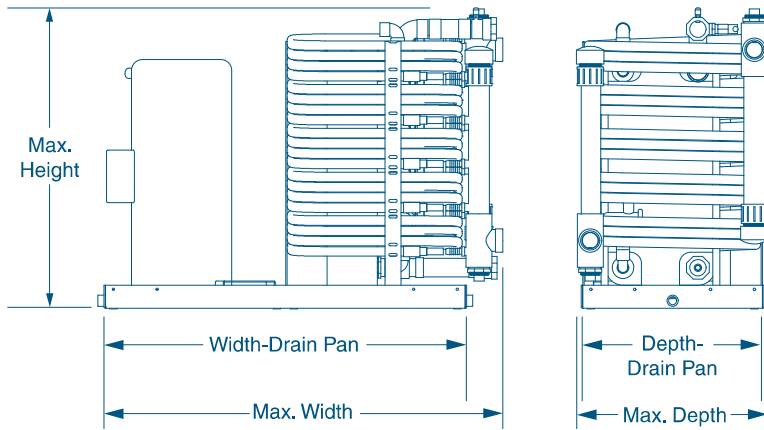

DOMETIC MARINE DIVISION

2000 N. Andrews Ave. Ext. | Pompano Beach, FL 33069 USA | Tel. 954-973-2477 | Fax: 954-979-4414  
 www.Dometic.com/Marine | MarineSales@DometicUSA.com

24/7 TECH SUPPORT FOR UNITED STATES & CANADA:

8:00 AM to 5:00 PM Eastern Time: 800-542-2477  
 After hours and weekends: 888-440-4494

INTERNATIONAL SALES & SERVICES

Europe & the Middle East: Call +44(0)870-330-6101  
 For all other areas visit our website to find your nearest distributor.

L-2627 Rev. 20160513

Specifications and availability subject to change without notice.



MARINE / CARAVAN REFRIGERATION & AIRCONDITIONING  
 CARAVAN REPAIRS

☎ 07 3286 3522 📍 259 South Street, Cleveland QLD 4163